



"They Get the Details Right"

Carpenters' Moulding Guide

W A S H I N G T O N

425 • 366 • 8828

GoWestPac.com



"They Get the Details Right"

For over 30 years, the local ownership of Western Pacific has been supplying the building industry with quality products for new home construction.

As an environmentally and socially conscious company, we source the majority our windows, doors and mouldings from regionally owned and operated manufacturers in the Pacific Northwest.

Our mission is to supply quality products on time to meet evolving homebuilders' requirements. We appreciate your business and look forward to working together on your home.


Fill-ins & End-of-Job Pick Ups

425 • 742 • 5195

Scheduling Department:

425 • 610 • 2029

ROUGH OPENINGS

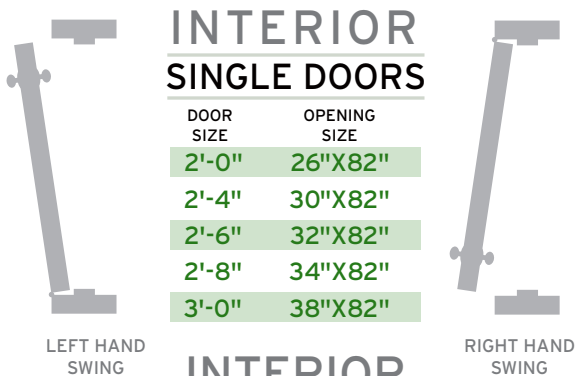

INTERIOR SINGLE DOORS

DOOR SIZE	OPENING SIZE
2'-0"	26"X82"
2'-4"	30"X82"
2'-6"	32"X82"
2'-8"	34"X82"
3'-0"	38"X82"

ASTRAGAL PAIRS

DOOR SIZE	OPENING SIZE
2'-0"	50-1/2"X82"
2'-4"	58-1/2"X82"
2'-6"	62-1/2"X82"
2'-8"	66-1/2"X82"
3'-0"	74-1/2"X82"

BALL CATCH PAIRS

DOOR SIZE	OPENING SIZE
2'-0"	50"X82"
2'-4"	58"X82"
2'-6"	62"X82"
2'-8"	66"X82"
3'-0"	74"X82"

INTERIOR

BIFOLDS

DRYWALL JAMB:
(DOOR WIDTH + 1-1/4")

BIPASS DOOR

DRYWALL JAMB:
(DOOR WIDTH X 2)

WOOD FULL JAMB:
(DOOR WIDTH + 2")

WOOD FULL JAMB
(DOOR WIDTH X 2) + 1"

POCKET DOOR

WOOD FRAME

(DOOR WIDTH X 2) + 2"
(DOOR HEIGHT) + 4-1/2"
EXAMPLE: 2668 = 62" X 84"

JOHNSON FRAME

(DOOR WIDTH X 2) + 1"
(DOOR HEIGHT) + 4-1/2"
EXAMPLE: 2668 = 61" X 84-1/2"

EXTERIOR

EXTERIOR SINGLE DOORS

	6/8	7/0	8/0
2' 6"	32" X 83"	32" X 87"	32" X 99"
2' 8"	34" X 83"	34" X 87"	34" X 99"
2' 10"	36" X 83"	36" X 87"	36" X 99"
3' 0"	38" X 83"	38" X 87"	38" X 99"

12" TRANSOMS OVER 6'8" DOORS
ARE NORMALLY 94-1/2" HEIGHT

EXTERIOR SIDELITE UNIT

ONE SIDELITE, ONE DOOR
(DOOR WIDTH) + (S/L WIDTH) + 3-1/2"

TWO SIDELITES, ONE DOOR
(DOOR WIDTH) + (S/L WIDTH X 2) + 5"

TWO SIDELITES, TWO DOORS
(DOOR WIDTH X 2) + (S/L WIDTH X 2) + 6"

6' 8" HEIGHT: 83"

7' 0" HEIGHT: 87"

8' 0" HEIGHT: 99"

EXTERIOR PAIRS

(DOOR WIDTH X 2) + 3"

6' 8" HEIGHT: 83"

7' 0" HEIGHT: 87"

8' 0" HEIGHT: 99"

SERVICES



JOB SITE TAKEOFF

Our experienced, professional team will walk your jobsite and do a detailed takeoff, including as needed: prehung doors, millwork, stairparts, locks & hardware, and windows.



PREHUNG DOORS

Your dedicated WestPac team will machine and assemble our quality doors together with jambs, brickmould, weatherseals, and other components into a ready-to-install unit, with great care and quality in mind.



CUSTOM DOORS

If you're aiming for unique interior design, or exclusive entry doors, we have experts on hand who will transform your creative vision into reality.



CUSTOM MILLWORK

Whether it's beautiful arch surrounds and casing, custom run moulding patterns, or exotic wood species, we have you covered with WestPac's experienced custom millwork shop.



HAND PULLED MOULDING PACKS

We take pride in our vast assortment of casing, base, crown, and closet material, and we'll handle with care as we package your items in the quantities and lengths you need.



JOB SITE DELIVERY

We deliver, rain or shine, on time to your jobsite. We get your order right and deliver it to your site quickly, so you can meet your deadlines with no surprises.



MOBILE APP

Maximize your efficiency by getting up-to-the-minute updates on your order status and delivery schedule by using our WestPac mobile app.

BASIC MOULDING TERMINOLOGY

MOULDING

FLAT STOCK


INTERIOR DOORS

STAIR PARTS

HARDWARE

TECHNICAL INFORMATION


NOTES

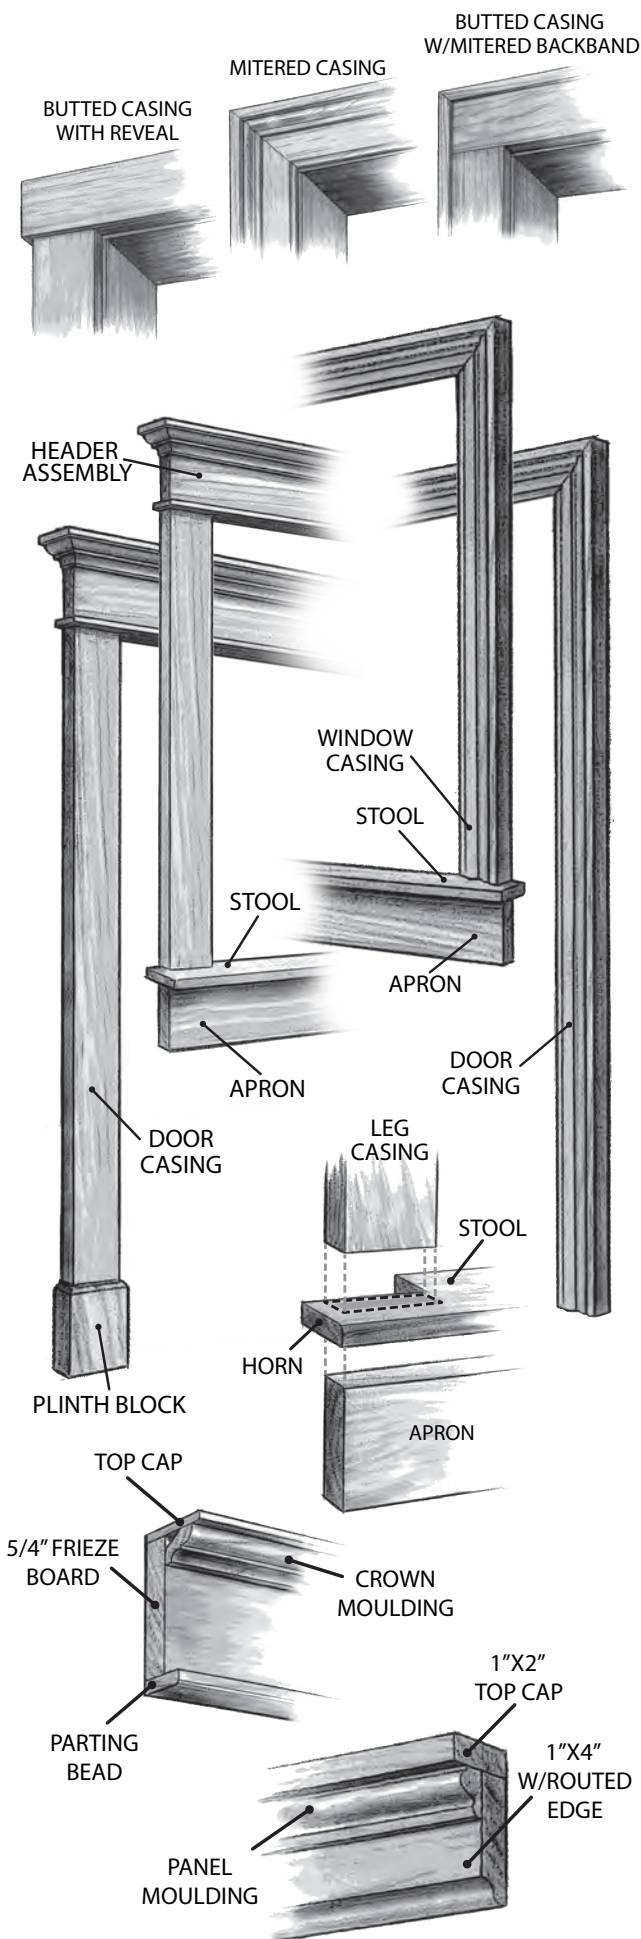

TRANSITIONAL

Style

M

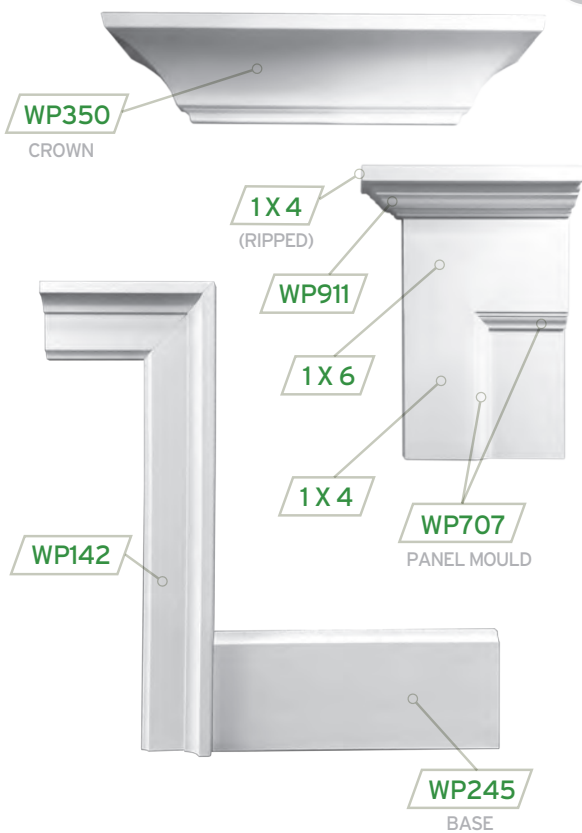

MOULDING

FLAT STOCK


INTERIOR DOORS

STAIR PARTS

CLASSIC

Style

A

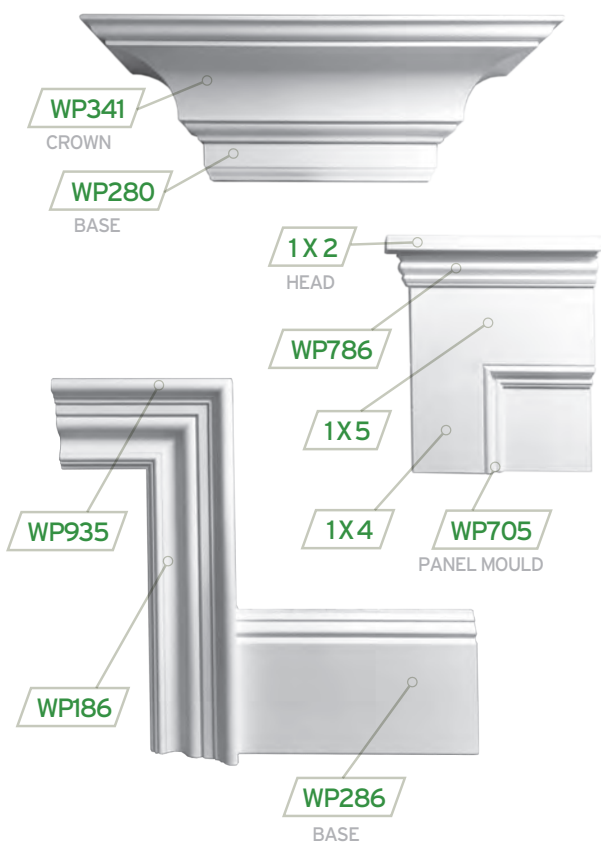

HARDWARE

TECHNICAL INFORMATION

NOTES

CLASSIC

Style

C

MOULDING

FLAT STOCK


INTERIOR DOORS

STAIR PARTS

HARDWARE

TECHNICAL INFORMATION

NOTES

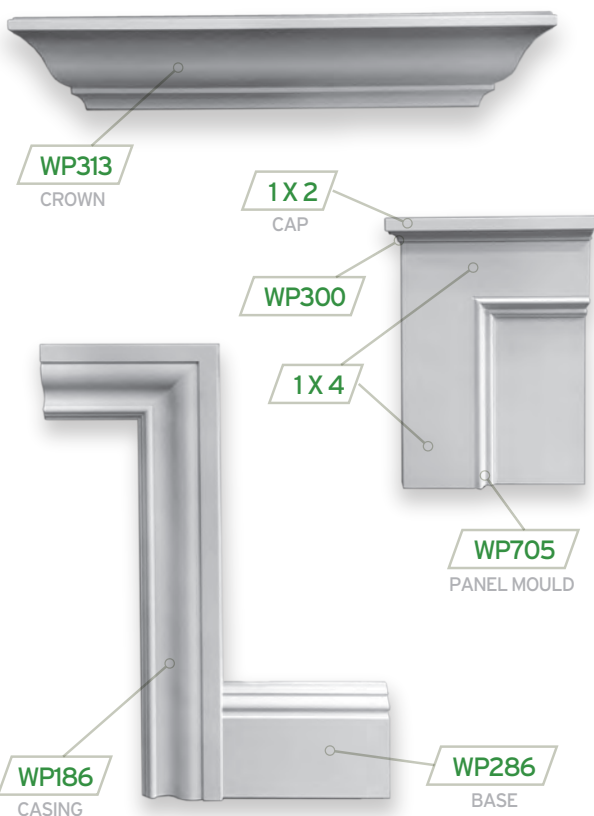

CLASSIC

Style

D



CRAFTSMAN

Style

G



MOULDING

FLAT STOCK


INTERIOR DOORS

STAIR PARTS

CRAFTSMAN

Style

I

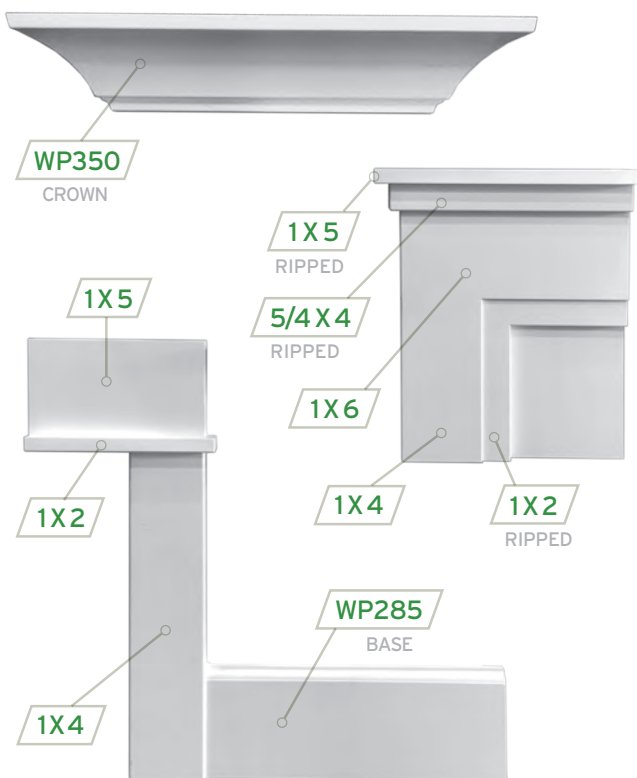

HARDWARE

TECHNICAL INFORMATION

NOTES

CRAFTSMAN

Style

E

MOULDING

FLAT STOCK


INTERIOR DOORS

STAIR PARTS

HARDWARE

TECHNICAL INFORMATION


NOTES

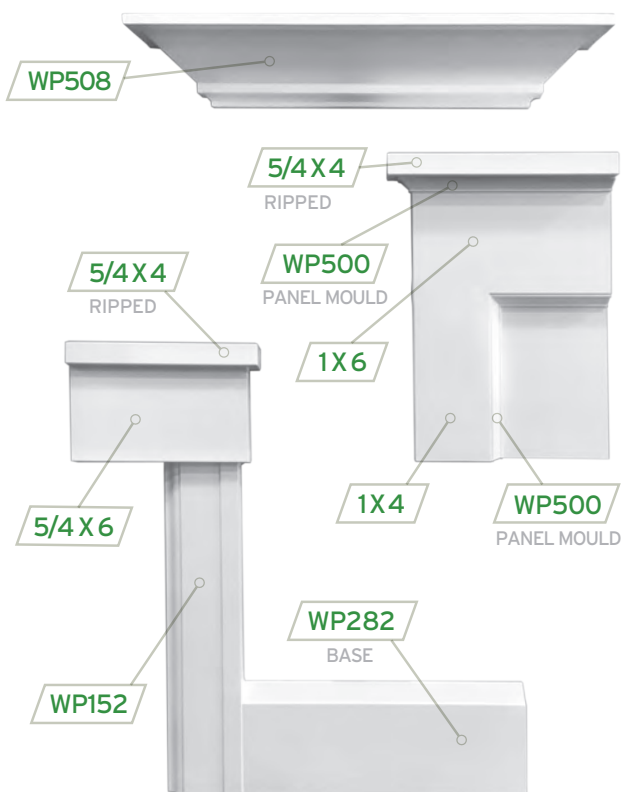

CRAFTSMAN

Style

F

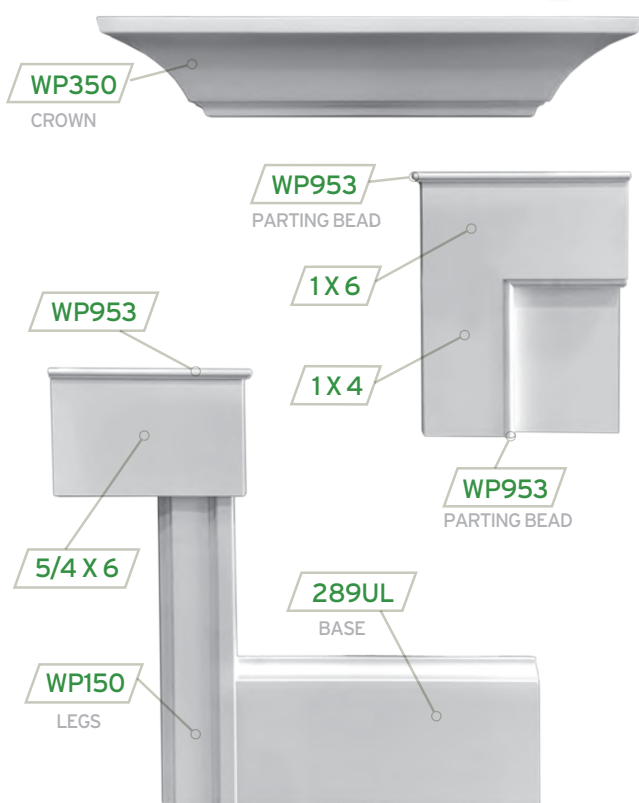

MOULDING

FLAT STOCK

INTERIOR DOORS

STAIR PARTS

HARDWARE


TECHNICAL INFORMATION

NOTES


Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions




WP105*
CASING
1/2" X 1-1/2"

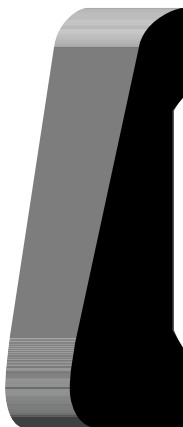

WP130*
CASING
9/16" X 2-1/4"

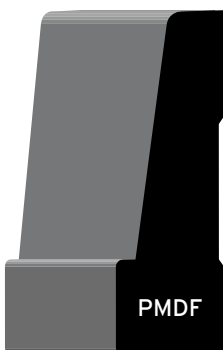

WP180
CASING
11/16" X 2-1/4"

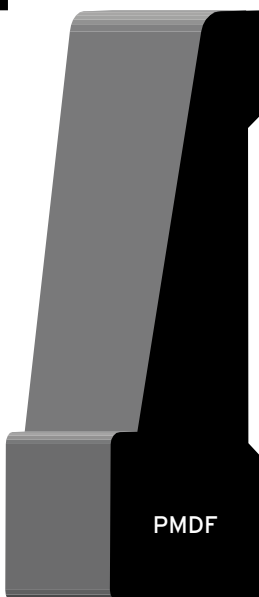

WP185
CASING
11/16" X 3-1/4"

Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions



WP188*

CASING

1-1/16" X 5-1/4"



WP184*

CASING

1" X 3-1/2"




WP186*

CASING

11/16" X 3-1/2"

Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions

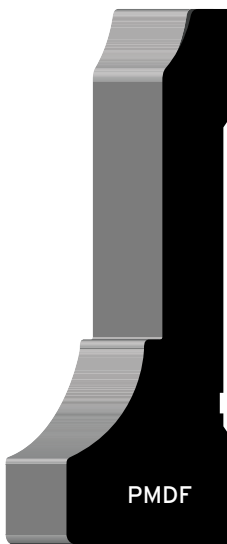


WP142

CASING
1" X 1-3/4"




WP143*

CASING
11/16" X 3-1/4"

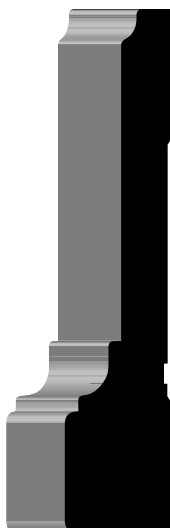

WP144*

CASING
1" X 4-1/4"

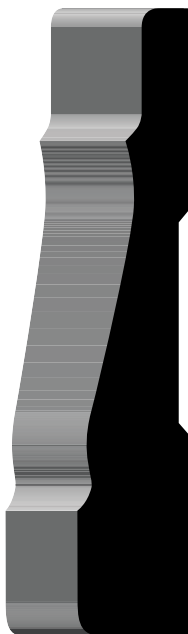

WP160*

CASING
5/8" X 3-7/16"



WP156

CASING
9/16" X 2-1/4"

Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions



WP154

CASING
13/16" X 4-1/4"



WP150

CASING
9/16" X 3-1/4"



WP152

CASING
9/16" X 3-1/2"



WP145*

CASING
5/8" X 2-1/4"

Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions



WP114*

CASING
11/16" X 3-1/4"



P MDF

WP176

CASING
7/16" X 3-1/2"



FIN
HEM
P MDF

WP175

7/16" X 2-1/4"



HEM

WP100

CASING
7/16" X 1-1/2"

Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions

**WP287**

9/16" X 7"

**WP283***

9/16" X 3-1/4"

**WP275**

BASE

3/8" X 3-1/4"

**WP286**

9/16" X 5-1/4"

MOULDING
FLAT STOCK
INTERIOR DOORS
STAIR PARTS
HARDWARE
TECHNICAL INFORMATION
NOTES

Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions



WP289
BASE
9/16" X 7"



WP285
BASE
1/2" X 5-1/4"



WP280
BASE
1/2" X 3-1/4"



WP270
BASE
1/2" X 2-1/4"



WP279
BASE
3/8" X 3-1/4"



WP282
BASE
9/16" X 5-1/4"

Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions



WP297*

BASE
9/16" X 7-1/4"



WP295*

BASE
9/16" X 5-1/4"



WP293*


BASE
9/16" X 3-1/4"

Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions



WP313


CROWN
9/16" X 4-1/4"



PMDF

WP512


CROWN
5-1/4" X 9/16"



PMDF

WP343


CROWN
1" X 6-15/16"



PMDF


WP351

CROWN
HEM • 9/16" X 3-1/4"
UL • 9/16" X 3-5/8"




WP354*

CROWN
9/16" X 2-1/4"



WP368*

CROWN
9/16" X 1-5/8"



*SPECIAL ORDER


PROFILES ARE NOT NECESSARILY ACTUAL SIZE

Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions




WP353

CROWN
9/16" X 3-1/2"





WP350

CROWN
5/8" X 5-3/16"




WP341

CROWN
1-3/16" X 6-5/16"




WP340

CROWN
11/16" X 4-1/4"



Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions

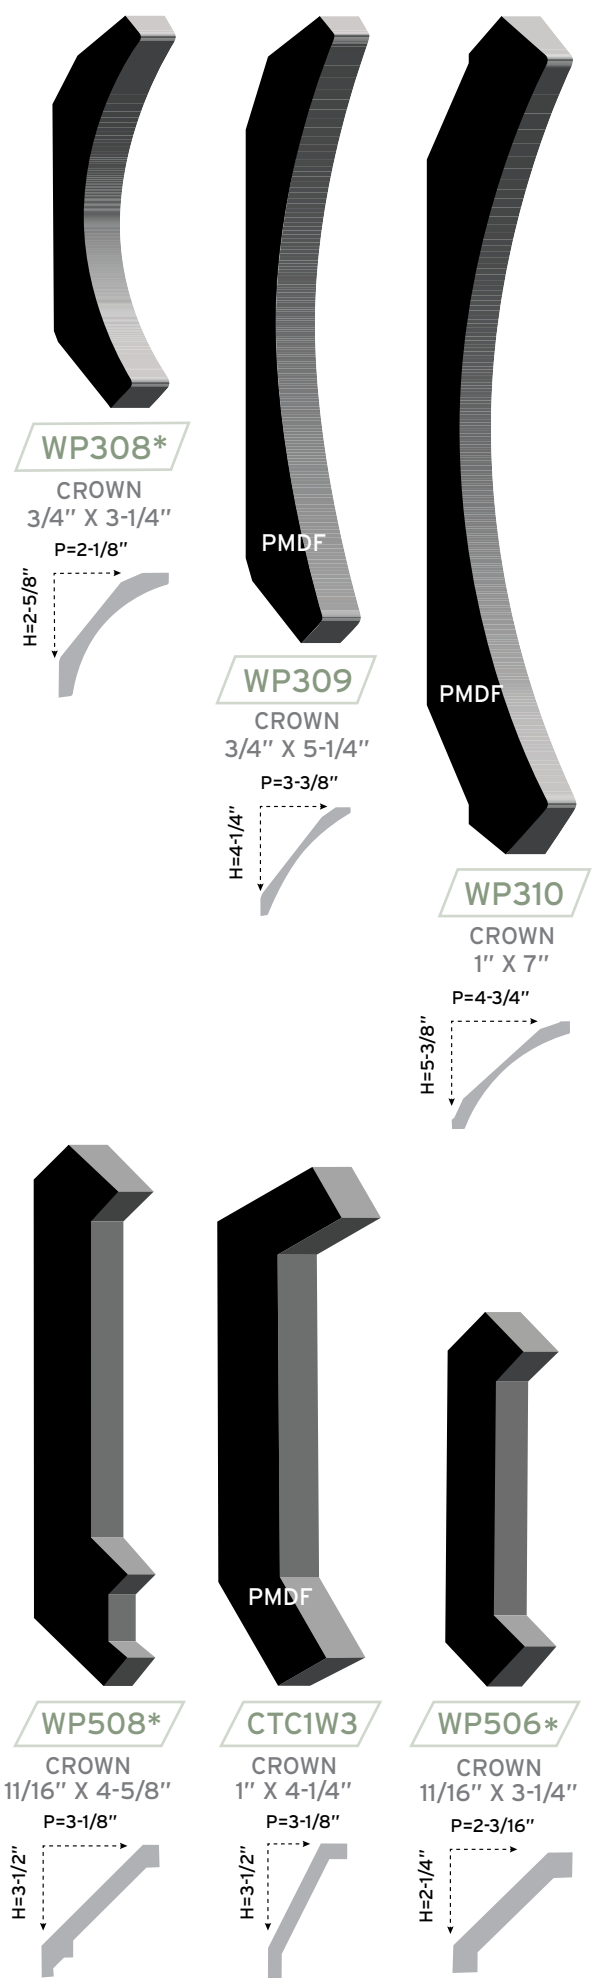

MOULDING

FLAT STOCK

INTERIOR DOORS

STAIR PARTS

HARDWARE

TECHNICAL INFORMATION

NOTES


Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions



WP3248*
Chair Rail
1-3/16" X 2-3/16"




WP3244*
Chair Rail
5/8" X 1-1/4"




← 3/4" →

WP1021*
BACKBAND
1-1/16" X 1-1/16"



← 11/16" →

WP922
BACKBAND
1-1/8" X 1-5/16"

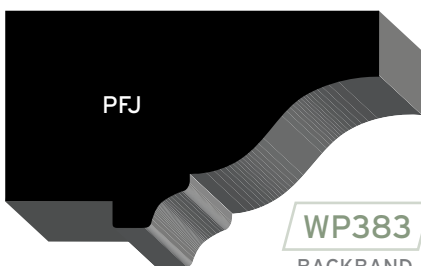

WP383
BACKBAND
1-3/8" X 2-7/16"



WP504*
LINTEL
1-1/2" X 2-3/8"

Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions



WP1004*

CHAIR RAIL

5/8" X 2-7/16"



WP1007*

CHAIR RAIL

1-1/8" X 2-1/2"



WP1008

CHAIR RAIL

11/16" X 3"



MXPEX106TG

T & G BEADED
REVERSIBLE

9/16 X 5-3/8"



WP126

SHIPLAP

1/2" X 5-5/16"



WP128

SHIPLAP

1/2" X 7-5/16"

MOULDING

FLAT STOCK

INTERIOR DOORS

STAIR PARTS

HARDWARE

TECHNICAL INFORMATION

NOTES

Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions



WP786*

BASE CAP
1/2" X 1-5/8"



PFJ

WP705

PANEL MOULD
3/4" X 1-1/8"



WP701*

PANEL MOULD
5/8" X 1-3/8"



PFJ

WP772

PANEL MOULD
1/2" X 1"



WP706

PANEL MOULD
3/4" X 2"




WP704*

PANEL MOULD
5/8" X 5/8"



WP500

PANEL MOULD
5/8" X 5/8"



WP707*

PANEL MOULD
5/8" X 3/4"



HEM


WP430

SCREEN
1/4" X 3/4"

*SPECIAL ORDER
PROFILES ARE NOT NECESSARILY ACTUAL SIZE

Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions


HEM




WP3428*

PARTING BEAD
7/16" X 3/4"

HEM




WP3260

COVE
1/2" X 1/2"


WP3264*

COVE
3/4" X 3/4"

HEM




WP320*

QUARTER ROUND
1/4" X 1/4"

WP321*

QUARTER ROUND
3/8" X 3/8"


HEM



WP322*

QUARTER ROUND
1/2" X 1/2"


WP324*

QUARTER ROUND
11/16" X 11/16"ALD
PFJ
HEM

WP451

BASE SHOE
7/16" X 3/4"

PWMDF



WP3288

BASE SHOE
1/2" X 3/4"

MOULDING

FLAT STOCK

INTERIOR DOORS


STAIR PARTS

HARDWARE

TECHNICAL INFORMATION

NOTES

Moulding dimensions subject to change without notice, contact your local WestPac office for correct dimensions

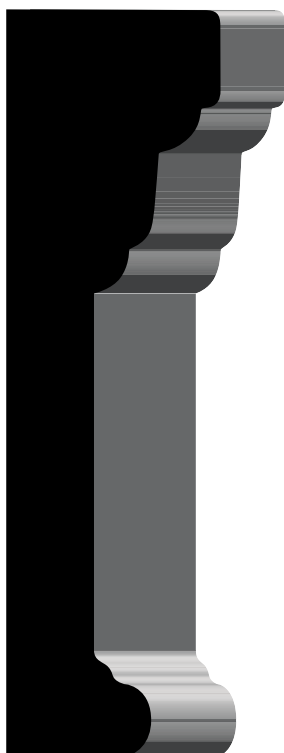

FLATSTOCK

SPECIES & SIZES AVAILABLE

	P MDF	P FJ	H E M	F I R	P O P	K A	O A K	C H E R R Y
MOULDING								
1/2" X 3"	S	×	A	A	×	×	×	×
1/2" X 4"	S	S	S	A	A	A	A	×
1/2" X 5"	S	×	S	×	×	×	×	×
FLAT STOCK								
1/2" X 6"	S	S	S	A	A	A	A	×
1/2" X 7"	×	×	S	×	×	×	×	×
1/2" X 8"	S	×	S	×	×	×	×	×
INTERIOR DOORS								
1" X 2"	S	S	S	A	A	S	A	A
1" X 3"	S	S	S	A	A	S	A	A
1" X 4"	S	S	S	A	A	S	A	A
1" X 5"	S	S	S	A	A	S	A	A
1" X 6"	S	S	S	A	A	S	A	A
1" X 7"	S	S	S	×	×	×	×	×
STAIR PARTS								
1" X 8"	S	S	S	A	A	S	A	A
1" X 10"	S	S	S	A	A	S	A	×
1" X 12"	S	S	S	A	A	S	A	×
HARDWARE								
5/4" X 4"	S	S	S	A	A	A	A	×
5/4" X 6"	S	S	S	A	A	S	A	×
5/4" X 8"	S	×	S	A	A	A	A	×

S STOCKED **A** AVAILABLE * **×** NOT AVAILABLE


*Typically available - but requires confirmation.

LENGTHS AVAILABLE

	MDF	16' LENGTHS
	FINGER JOINT	16' LENGTHS
	HEMLOCK	RANDOM LENGTHS
	FIR	RANDOM LENGTHS
	POPLAR	RANDOM LENGTHS
	KNOTTY ALDER	SHORT RANDOM LENGTHS
	OAK	RANDOM LENGTHS
	CHERRY	RANDOM LENGTHS


WESTPAC CASCADE DOORS

SHAKER/SQUARE STICKING • FLAT PANEL
1-3/8" • STILE & RAIL • 6/8 & 8/0
(1-3/4" AVAILABLE IN 2/8 AND 3/0 WIDTHS)

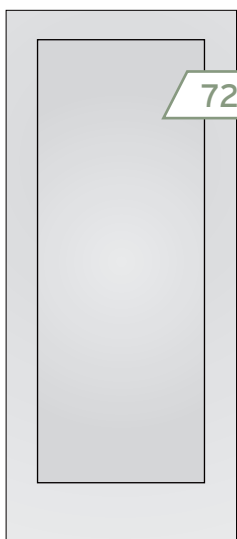


720

PRIMED
HEMLOCK

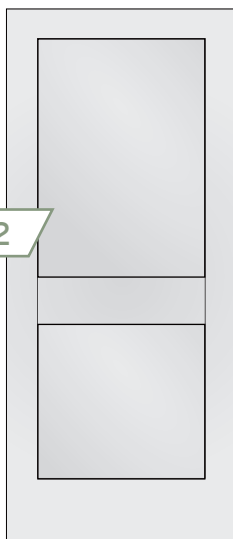


782

PRIMED
HEMLOCK

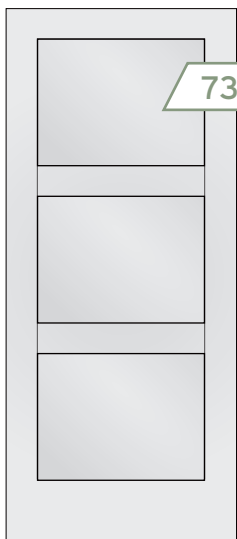


730

PRIMED
HEMLOCK

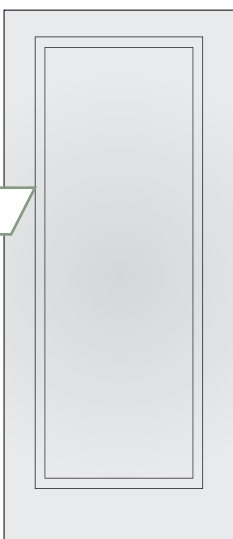


721

PRIMED
HEMLOCK

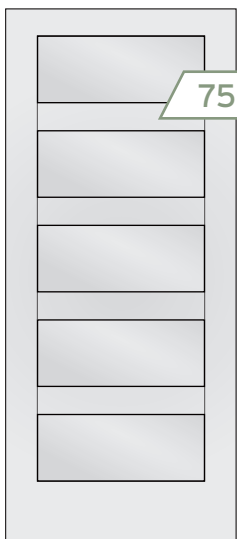

755

PRIMED
HEMLOCK

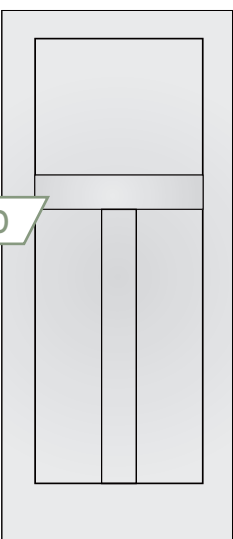

760

PRIMED
HEMLOCK

MOULDING

FLAT STOCK


INTERIOR DOORS

STAIR PARTS

HARDWARE


TECHNICAL INFORMATION

NOTES

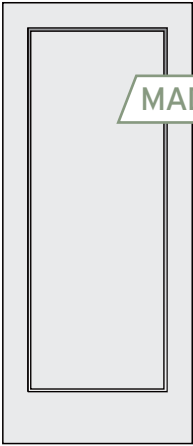


MADISON

FLAT PANEL
SMOOTH
PASSAGE/BIFOLD
6/8 • 8/0

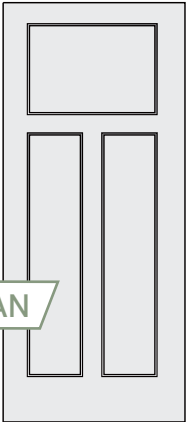


CRAFTSMAN

FLAT PANEL
SMOOTH
PASSAGE/BIFOLD
6/8 ONLY

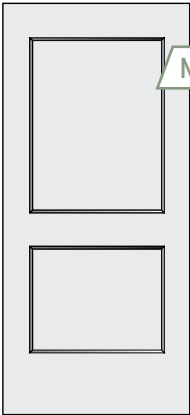


MONROE

FLAT PANEL
SMOOTH
PASSAGE/BIFOLD
6/8 ONLY

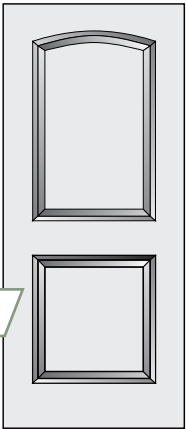


CAIMAN

SMOOTH
PASSAGE/BIFOLD
6/8 • 8/0

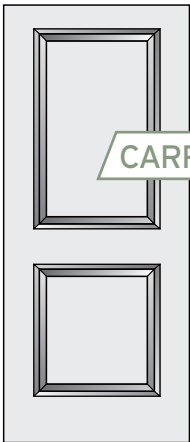

CARRARA

SMOOTH
PASSAGE/BIFOLD
6/8 • 8/0

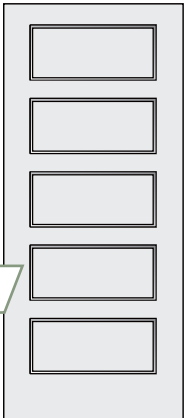

CONMORE

FLAT PANEL
SMOOTH
PASSAGE/BIFOLD
6/8 ONLY

MOULDING

FLAT STOCK


INTERIOR DOORS

STAIR PARTS

HARDWARE


TECHNICAL INFORMATION

NOTES

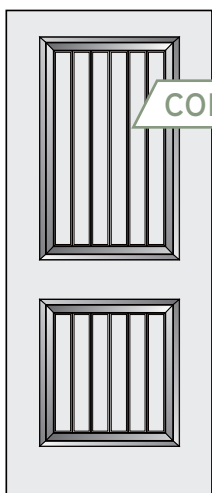


CORVADO

SMOOTH
PASSAGE/BIFOLD
6/8 • 8/0

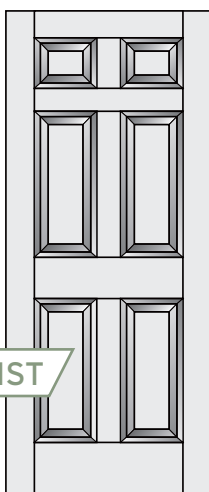


COLONIST

SMOOTH or
TEXTURED
PASSAGE/BIFOLD
6/8 • 8/0

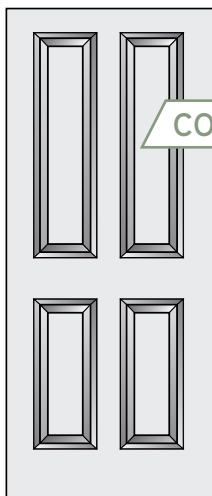

COVENTRY

SMOOTH
PASSAGE/BIFOLD
6/8 • 8/0

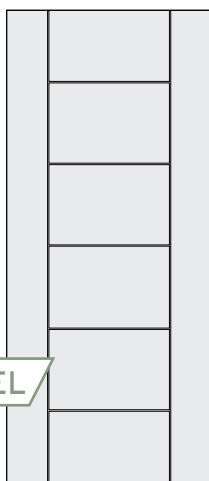


HAMEL

SMOOTH
PASSAGE/BIFOLD
FLUSH W/KERF LINES
6/8 • 7/0



MELROSE

SMOOTH
PASSAGE/BIFOLD
FLUSH W/KERF LINES
6/8 • 7/0


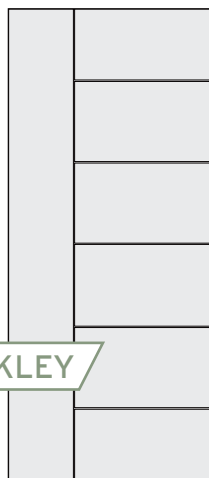


BERKLEY


SMOOTH
PASSAGE/BIFOLD
FLUSH W/KERF LINES
6/8 • 7/0

HANDRAILS

MOULDING



FLAT STOCK



Handrails can be plowed upon request

INTERIOR DOORS



STAIR PARTS



HARDWARE

TECHNICAL INFORMATION

NOTES



FITTINGS

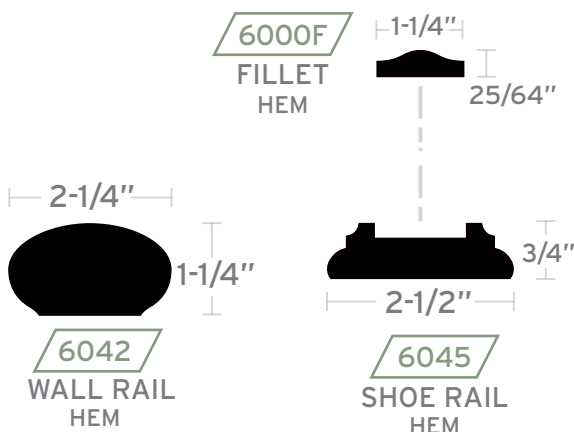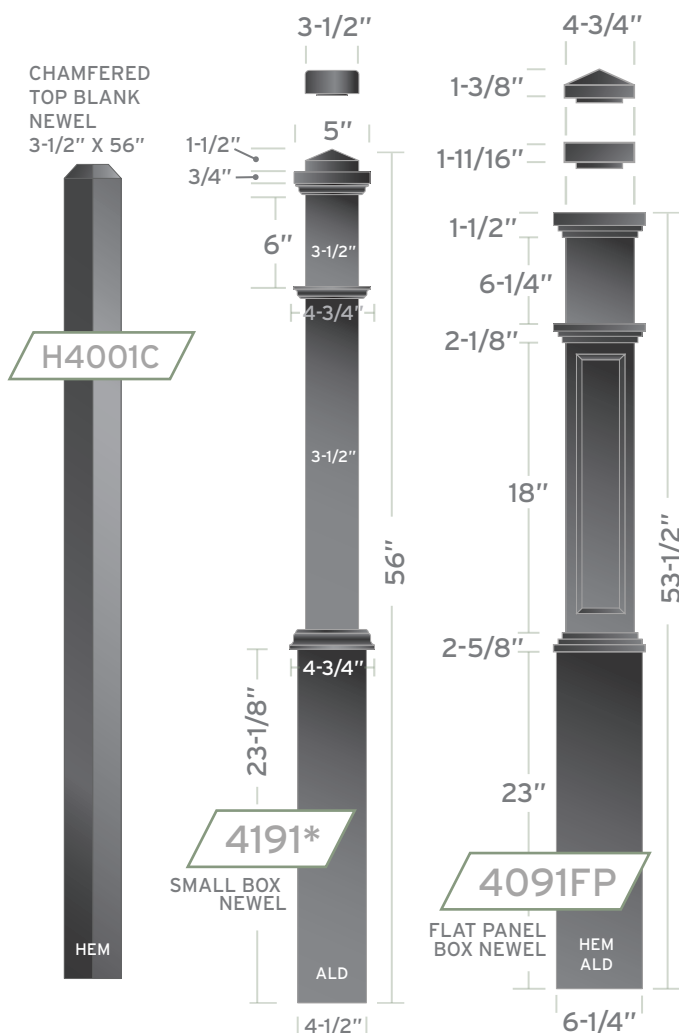

MOULDING

FLAT STOCK

INTERIOR DOORS

STAIR PARTS

HARDWARE


TECHNICAL INFORMATION

NOTES

HARDWARE

SLIDING DOOR HARDWARE SETS

GBT BLACK OR SILVER

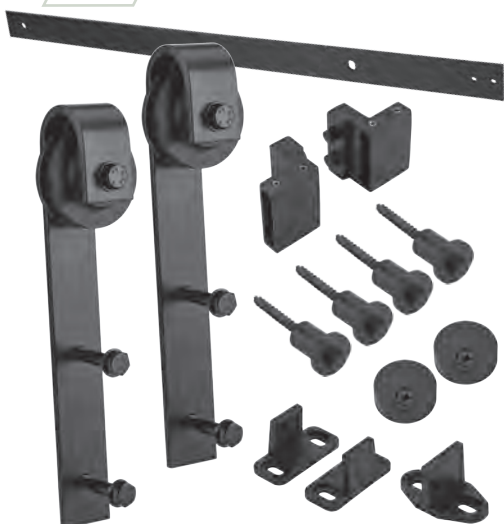

SPRING DOOR STOP



FLOOR STOP



BYPASS CUPS




HINGE DOOR STOP



BF KNOBS



PEEP SIGHT

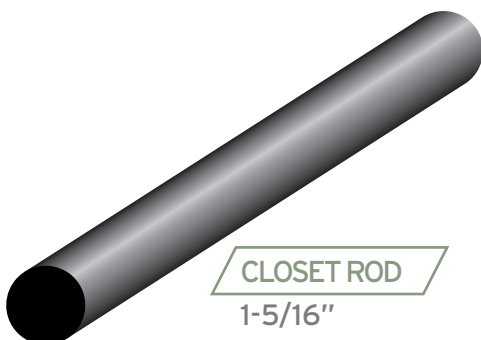

CLOSET ROD
1-5/16"

MOULDING

FLAT STOCK

INTERIOR DOORS

STAIR PARTS

HARDWARE

TECHNICAL INFORMATION

NOTES

MISCELLANEOUS HARDWARE

24" TOWEL BAR



18" TOWEL BAR



HAND TOWEL BAR



BATH TISSUE BAR



ROBE HOOK



5" BRUSHED NICKEL HOUSE NUMBERS



5" BLACK HOUSE NUMBERS



POCKET DOOR
PASSAGE



POCKET DOOR
PRIVACY

MOULDING

FLAT STOCK

INTERIOR DOORS

STAIR PARTS

HARDWARE

TECHNICAL INFORMATION

NOTES

RESIDENTIAL HARDWARE

MOULDING

FLAT STOCK

INTERIOR DOORS

STAIR PARTS

HARDWARE

TECHNICAL INFORMATION

NOTES



CHELSEA



HAWTHORNE



TAVARIS



HANCOCK



780



HALIFAX



HALIFAX



TUSTIN



MILAN



MILAN

RESIDENTIAL HARDWARE



ADDISON
HANDSET



CENTURY
HANDSET



PLYMOUTH
HANDSET



ACCENT
HANDSET



SOLSTICE
LEVER



LATITUDE
LEVER



SEVILLE
LEVEL



TORINO
LEVER



STRATUS
KNOB



CORONA
KNOB

MOULDING

FLAT STOCK

INTERIOR DOORS

STAIR PARTS

HARDWARE

TECHNICAL INFORMATION

NOTES

We also offer...

EMTEK®
ASSA ABLOY



BALDWIN

FINISH LUMBER DESCRIPTIONS

3/4" thick with four square edges, and available in random lengths.

Custom Milling Available in all species:

- Sanding
- Ripping to Custom Width
- Planing to Custom Thickness

RED OAK

Sapwood is white to light brown and the heartwood is a pink or reddish brown. Similar in appearance to White Oak, but with smaller grain rays. Red Oak is mostly straight-grained, with a coarse texture.

WHITE OAK

The sapwood is light-colored and the heartwood is light to dark brown. White Oak is mostly straight-grained with a medium to coarse texture, and with longer grain rays than red oak.

EASTERN HARD MAPLE

Creamy white in color with a fine, uniform texture and generally mixed grain.

AMERICAN CHERRY

Rich red to reddish brown. Will darken with age and on exposure to light. May contain some creamy white sapwood. Fine uniform, straight grain, satiny, smooth texture.

CLEAR ALDER

Light brown with a yellow or reddish tinge. Fairly straight-grained with a uniform texture. Occasional pin knots may be present.

KNOTTY ALDER

Light brown with a yellow or reddish tinge. Fairly straight-grained with a uniform texture. Multiple large open and tight knots will be present.

CVG FIR

Even, straight, vertical grain that stains out beautifully. Reddish in color. Also good for outdoors when painted.

CVG HEMLOCK

Our most popular stain grade softwood. A close relative of Fir but more yellowish in color. Fine uniform texture and vertical grain pattern, that easily obtains a rich finish. Also good for paint grade.

EASTERN POPLAR

Solid paint grade hardwood. Smooth and even surface that paints out beautifully. Our high quality Eastern Poplar is lighter in color, more dense, and less fuzzy when machining than Western varieties.

WALNUT

Light to dark chocolate brown in color, with straight grain from the trunk and more waved grain near the roots. Walnut is hard and durable with excellent shaping qualities, making it one of the most popular and versatile woodworking species. It takes finish very well.

MOULDING

FLAT STOCK

INTERIOR DOORS

STAIR PARTS

HARDWARE

TECHNICAL INFORMATION

NOTES

PAINTING INSTRUCTIONS

RECOMMENDED PROCEDURE TO PAINT WOOD AND MDF MOULDINGS AND BOARDS

MOULDING

● **PART 1 • PREPARE THE TRIM**

STEP 1: Use a damp sponge to clean dirt and grime from trim. If needed, use the rough side of a sponge to ensure a clean starting surface.

STEP 2: Sand the surface. After the trim has been sanded, use a damp sponge to wipe away any dust.

SANDING TIP: If the trim is smooth, lightly sand using 120-grit sandpaper until all shine disappears from the trim. If the trim has a rough milling area start by sanding with coarse, 80-grit sandpaper. Then, move to less-coarse sandpaper such as 100 or 120 grit to smooth the surface.

FLAT STOCK

INTERIOR DOORS

STEP 3: Fill in holes, dents and cracks with a lightweight spackling compound. (Follow directions on the spackling container for best results.) When the spackle dries completely, lightly sand the spackled areas using 120 grit sandpaper to smooth out the surface. Use tack cloth to remove any sanding dust from the trim.

STEP 4: Dust off walls and ceiling around the trim to ensure painter's tape adheres well. Apply painter's tape to walls and ceilings surrounding the trim, being careful not to stick the tape to the trim itself. To prevent paint from bleeding through the tape, try to use one long piece of tape instead of multiple shorter pieces.

STEP 5: After you have applied the tape, press the tape's edges with a clean spackling or putty knife to ensure adhesion, as this helps prevent the paint from bleeding through the edges.

STAIR PARTS

HARDWARE

● ● **PART 2 • PAINT THE TRIM AND BOARDS**

STEP 1: Apply primer to trim, covering any bare wood and spackled areas. Allow primer to dry for 24 hours. After the drying period, if bare wood or spackle is showing, apply another coat of primer to the trim.

STEP 2: After the primer dries, lightly sand the trim using 120-grit sandpaper to eliminate brush strokes or paint drips. Use a damp sponge or tack cloth to remove all sanding dust.

STEP 3: Apply paint to the trim using short, horizontal brush or spray gun strokes. Repeat the motion until a few feet of trim (not the full length) are covered in paint.

STEP 5: Allow the paint to dry for 24 hours. After the drying period for latex paint, lightly sand the trim using 180 grit sandpaper to eliminate brush strokes or paint drips. Use a sponge or tack cloth to remove all sanding dust. Oil-based paint does not require sanding between paint applications. Apply paint to the trim using short, horizontal brush or spray-gun strokes. Repeat the motion until a few feet of trim (not the full length) are covered in paint.

STEP 6: Before the paint dries, carefully pull the tape off of the wall and trim.

TECHNICAL INFORMATION

NOTES

STAINING INSTRUCTIONS

RECOMMENDED WOOD STAINING PROCEDURE

WOOD PREPARATION

Wood must be dry and cleaned of dirt, grease, wax, polish, and marks. See STEP 1 for details.

(For exterior wood doors, Western Pacific recommends Epifanes Wood Finish Matte top coat for the best results and long lasting finish. (Available at Marine Supply. Epifanes.com)

THE "FINGERNAIL TEST"

Determine if you have a soft wood or a hard wood.

We consider Fir, Hemlock and Alder to be softwoods and Oak, Cherry and Maple are typically hardwoods. If your fingernail dents the surface when you scratch it, you have a soft wood.

Since soft woods tend to absorb stain unevenly and become blotchy easily, pre-treat the wood using pre-stain wood conditioner before staining. This critical extra step will help you control stain color penetration and prevent blotchiness.

CHOOSING A COLOR

Your finished color is determined by many factors, from the color of the stain selected to how long the stain is left on. But remember: Different species of wood absorb stain differently. Test the color on an inconspicuous area or sample board before you start staining most visible parts of your project.

Always stop your staining process if you are not achieving your desired finish and ask a painting professional for additional advice.

To assure the highest quality results when applying interior wood stain, follow these steps.

STEP 1: Start with a medium grade of sandpaper (e.g., #120) and gradually work your way to a finer grade (e.g., #220). Sand in the direction of the grain for a smooth, uniform finish, and remove all sanding dust, using a vacuum, dry paint brush or tack cloth, before finishing.

STEP 2: Mix the stain thoroughly before you begin and frequently while you're staining. This helps keep the color consistent throughout the project. Ingredients in stains and finishes can settle over time. Stir until all settlement is evenly dispersed. Shaking will only add unwanted bubbles to the product.

STEP 3: Before proceeding, apply the stain on a discreet area of wood to test the color.

TIP: ● ● ●

Apply stain only at the proper temperature. For most stains, 70°F is the optimum, with the safety range from 50° to 90°F. Stains do vary, so check the label first. Avoid high humidity when applying stain. All finishes, including stains and paint, have trouble drying in humid conditions.

STEP 4: Apply stain by brushing or wiping it in the direction of the grain, using smooth and even strokes. Wipe off any excess.

TIP: ● ● ●

Avoid unattractive lap marks by applying stain from an unpainted area back into the last wet stain. In other words, don't let a section of stain dry before you blend it in with stain from an adjoining section.

STEP 5: Let dry completely (usually 24 hours). Apply a second coat of stain to achieve a darker look.

STEP 6: After the wood is dry, brush or spray on a uniform coat of your top coat product. After the top coat dries, lightly sand the trim using 220-grit sandpaper to eliminate brush strokes or paint drips. Use a damp sponge or tack cloth to remove all sanding dust.

MOULDING

FLAT STOCK

INTERIOR DOORS

STAIR PARTS

HARDWARE

TECHNICAL INFORMATION

NOTES

RETURNS

Material returns are subject to Western Pacific approval. Western Pacific will accept a return of a product, for credit, that has been purchased from Western Pacific inventory.

Western Pacific will not accept a return of product, for credit, that has been modified or damaged by a person or party other than Western Pacific. Examples of such product are millwork items that have been cut in length, hardware not in its original box, etc.

Furthermore, product ordered for a specific job, such as pre-hung doors, non-stock doors only, pre-finished millwork, etc., may not be returned for credit.

CANCELLATIONS & CHANGES

Once an order has been placed for custom items, pre-hung doors, or windows, the order may not be cancelled or otherwise changed.

WARRANTY

Western Pacific makes no representations or warranties, either expressed or implied, with respect to the building materials beyond those specifically made by the manufacturer. We can help coordinate warranty resolution for products, but it will be your responsibility to contact the manufacturer directly. Western Pacific is not responsible for any type of freight charges for warranty issues and is not responsible for warranty issues or discrepancies for products exported outside the USA.

DELIVERY

Western Pacific will make every effort to deliver all product in a timely manner. However, Western Pacific assumes no liability for theft, or delivery delays, beyond the reasonable control of Western Pacific.

PAYMENT

All charges are due and payable on the 10th of each month, except for cash accounts which are due prior to production. Any disputes must be raised within 10 days. Buyer acknowledges that any quotes or bids from Western Pacific are only for the materials listed and buyer assumes responsibility to ensure quantities are sufficient to complete the job.



June • 2020

LOCATIONS

Seattle • Washington

1101 Industry Street
Everett, WA 98203
Phone: 425-366-8828
Fax: 425-742-5280

Bellevue • Washington Design Studio

13208 NE 20th Street • Suite 150
Bellevue, WA 98005
Phone: 425-250-8327
Fax: 425-558-5828

Portland • Oregon

2805 NW 31st Avenue
Portland, Oregon 97210
Phone: 503-223-8818
Fax: 503-224-9129

Medford • Oregon

502 Parsons Drive
Medford, OR 97501
Phone: 541-772-8818
Fax: 541-770-3736

Denver • Colorado

320 S Lipan Street
Denver, CO 80223
Phone: 303-454-8811
Fax: 303-394-3312

Houston • Texas

7607 Bluff Point Drive
Houston, TX 77086
Phone: 832-975-0070
Fax: 832-975-0071

Austin • Texas

15855 Long Vista Dr. • Ste 103
Austin, TX 78728
Phone: 512-989-1445

HOURS

MONDAY - FRIDAY
7 AM - 4:30 PM

gowestpac.com